


# BJ132-B

## HOOK-CLAMP ASSEMBLIES WITH FLANGED HOLDER

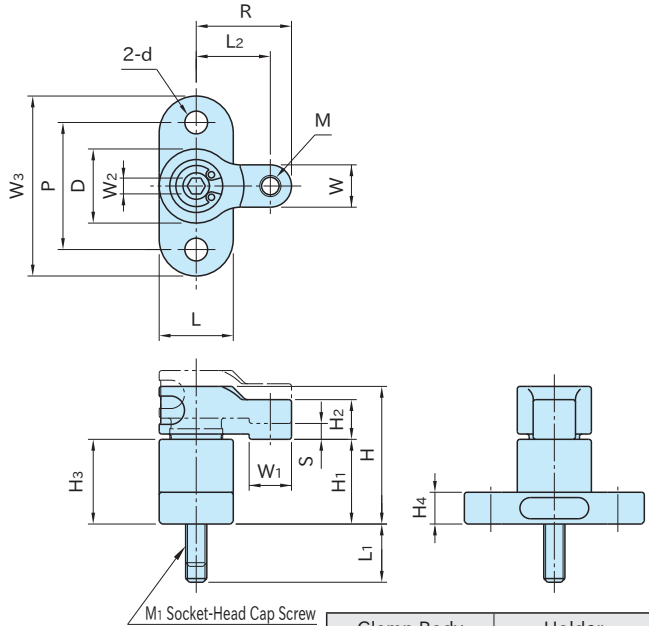

M1 Socket-Head Cap Screw

Clamp Body	Holder
SCM440 steel	S45C steel
Quenched and tempered	Quenched and tempered
Black oxide finished	Black oxide finished

Part Number	H <sub>1</sub>	S (Clamping Stroke)	W <sub>1</sub>	M	L <sub>2</sub>	R	W <sub>3</sub>	L	M <sub>1</sub>	L <sub>1</sub> (max)	d	H <sub>4</sub>	P	H	H <sub>3</sub>	D	W	H <sub>2</sub>	W <sub>2</sub>
<b>BJ132-04018B</b>	16	3	8	M4×0.7	14	18	34	14	M4×0.7-30L	11	4.3	6	24	26	16	14	8	7.5	3
<b>BJ132-06022B</b>	19	4	10	M5×0.8	17	22	40	16	M6×1 -35L	12	5.3	8	28	32	19	16	10	9.5	5

Part Number	Clamping Force (kN)	Allowable Screw Torque (N·m)	Weight (g)
<b>BJ132-04018B</b>	2	2.7	45
<b>BJ132-06022B</b>	3.5	7	75

### Feature

- Ideal for low height clamping.
- The hook clamp is designed to move up and down in conjunction with the tightening screw, for prevention of galling in the hook-clamp holder.

Part Number	M <sub>2</sub>	M <sub>3</sub>	P <sub>2</sub>
<b>BJ132-04018B</b>	M4×0.7 Depth 13	M4×0.7	24
<b>BJ132-06022B</b>	M6×1 Depth 14	M5×0.8	28

### How To Use

