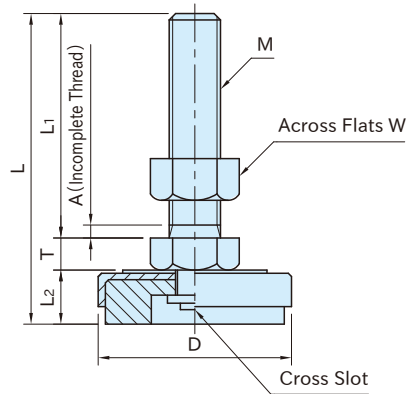


**KA****LEVELING FEET with Rubber Pad**

Foot	Stud, Hex Nut	Rbber Pad	Washer
Steel (SPCC) Zinc trivalent chromate finish	Steel (SS400) Zinc trivalent chromate finish	Chloroprene Black	Polyamide Translucent

Part Number	D	L	L <sub>1</sub>	L <sub>2</sub>	T	M	W	A	Static Load Capacity (N)	Weight (g)
<b>KA40-08×060R</b>	40	78.5	60	13	5.5	M 8×1.25	13	2.5	3000	70
<b>KA40-10×050R</b>		70	50		7	M10×1.5	17	3		90
<b>KA50-12×070R</b>	50	93	70	15	8	M12×1.75	19	3.5	5000	170
<b>KA60-16×070R</b>	60	97			10	M16×2	24	4		290
<b>KA60-20×100R</b>		130	100	13	M20×2.5	30	5	7000	470	
<b>KA60-20×130R</b>		160	130						540	

**Features**

- Use the cross slot provided on the bottom and the hex nut above the foot for installation.
- The cushioned rubber pad prevents slippage, and is lightly vibration-proof with resistance to liquid.